





# LACC



Fixed Choke Coils

Leaded Inductors

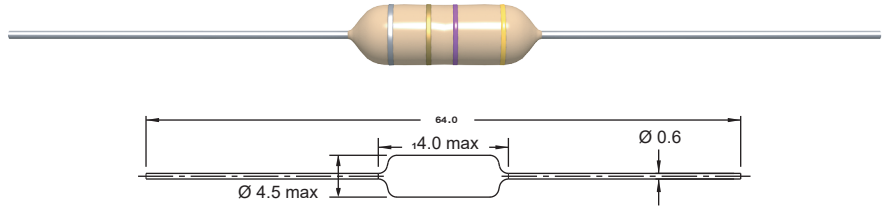

Single layer (typ)

Part No	Inductance	f <sub>L</sub> (MHz)	Tol ± (%)	Q min	f <sub>α</sub> (MHz)	SRF min (MHz)	DCR max (Ω)	Rated DC Current (A)
	L (µH)							
LACC-1R0X-YY	1.0	1	<b>10,20</b>	60	25.2	175	0.09	2.00
LACC-1R2X-YY	1.2	1	<b>10,20</b>	60	7.96	157	0.10	1.95
LACC-1R5X-YY	1.5	1	<b>10,20</b>	60	7.96	144	0.11	1.90
LACC-1R8X-YY	1.8	1	<b>10,20</b>	60	7.96	135	0.12	1.85
LACC-2R2X-YY	2.2	1	<b>10,20</b>	60	7.96	121	0.15	1.70
LACC-2R7X-YY	2.7	1	<b>10,20</b>	60	7.96	113	0.15	1.65
LACC-3R3X-YY	3.3	1	<b>10,20</b>	60	7.96	103	0.23	1.10
LACC-3R9X-YY	3.9	1	<b>10,20</b>	60	7.96	96	0.30	1.05
LACC-4R7X-YY	4.7	1	<b>10,20</b>	60	7.96	89	0.33	1.00
LACC-5R6X-YY	5.6	1	<b>10,20</b>	60	7.96	85	0.37	0.90
LACC-6R8X-YY	6.8	1	<b>10,20</b>	50	7.96	72	0.45	0.875
LACC-8R2X-YY	8.2	1	<b>10,20</b>	50	7.96	66	0.63	0.84
LACC-100X-YY	10	1	<b>10,20</b>	50	7.96	57	0.73	0.80
LACC-120X-YY	12	0.02	<b>10,20</b>	50	2.52	51	1.35	0.65
LACC-150X-YY	15	0.02	<b>10,20</b>	60	2.52	47	1.50	0.61
LACC-180X-YY	18	0.02	<b>10,20</b>	60	2.52	44	1.65	0.565
LACC-220X-YY	22	0.02	<b>10,20</b>	60	2.52	41	1.86	0.51
LACC-240X-YY	24	0.02	<b>10,20</b>	60	2.52	41	1.86	0.51
LACC-270X-YY	27	0.02	<b>10,20</b>	60	2.52	38	2.10	0.49
LACC-330X-YY	33	0.02	<b>10,20</b>	55	2.52	36	2.40	0.45
LACC-390X-YY	39	0.02	<b>10,20</b>	55	2.52	33	2.70	0.43
LACC-430X-YY	43	0.02	<b>10,20</b>	55	2.52	33	2.70	0.43
LACC-470X-YY	47	0.02	<b>10,20</b>	55	2.52	31	3.00	0.39
LACC-560X-YY	56	0.02	<b>10,20</b>	55	2.52	29	3.40	0.36

Core Material: Ferrite

Revision date: 11 Aug 2014

SPQ:	Packaging Form	Taped / Reel	Taped / Ammo pack
	Axial	3000 [-01]	1000 [-02]