



SSSC 

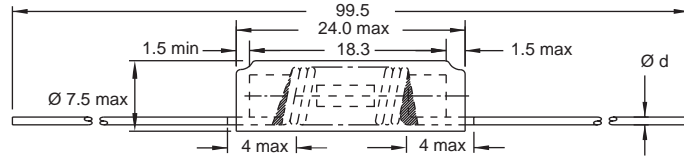

Part No	Inductance	f_L	Tol	DCR	Rated DC	$\varnothing d$
	L (μH)	(MHz)	\pm (%)	max (m Ω)	Current (A)	(mm)
SSSC-4R0M-00	4	1	20	14	6	0.8
SSSC-6R0M-00	6	1	20	17	4	0.75
SSSC-8R0M-00	8	1	20	25	3	0.63, 0.65
SSSC-170M-00	17	0.1	20	63	2	0.45

Single layer

Core Material : Ferrite

Revision date : 02 Sept 2016

SPQ :

Packing Form	Loose / Box
Axial	500 [-00]

Remarks : - Available also without insulating material (SSSC/B)
- Single layer - Model with Insulation Foil are suitable for application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).