


**07 P/F**


with cap



Packing	C1
Loose / Box	10.5
Taped / Reel	26.0

(Pin Type Coils)

Plugable Inductors

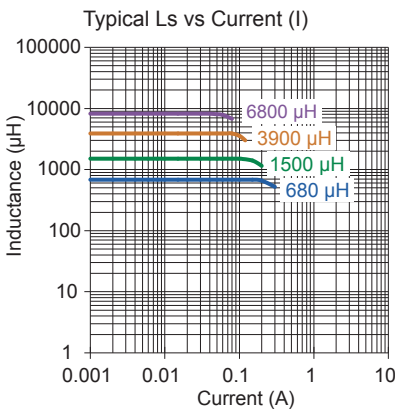

Part No	Inductance	f <sub>L</sub>	Tol	Q	f <sub>Q</sub>	SRF <sub>min</sub>	DCR <sub>max</sub>	Rated DC Current
	L (µH)	(MHz)	± (%)	min	(MHz)	(MHz)	(Ω)	
07P/F-681K-YY	680	0.02	<b>10</b>	80	0.796	2.3	3.7	170
07P/F-821K-YY	820	0.02	<b>10</b>	80	0.796	2.1	4.1	160
07P/F-102X-YY	1000	0.02	<b>5,10</b>	100	0.252	1.8	5.4	150
07P/F-122X-YY	1200	0.02	<b>5,10</b>	100	0.252	1.6	5.8	140
07P/F-152X-YY	1500	0.02	<b>5,10</b>	100	0.252	1.5	6.5	130
07P/F-182X-YY	1800	0.02	<b>5,10</b>	100	0.252	1.4	7.5	120
07P/F-222X-YY	2200	0.02	<b>5,10</b>	100	0.252	1.3	8.8	110
07P/F-272X-YY	2700	0.02	<b>5,10</b>	100	0.252	1.2	9.8	100
07P/F-332X-YY	3300	0.02	<b>5,10</b>	100	0.252	1.1	13.0	80
07P/F-392X-YY	3900	0.02	<b>5,10</b>	100	0.252	1.0	16.5	75
07P/F-472X-YY	4700	0.02	<b>5,10</b>	100	0.252	0.9	18.5	70
07P/F-562X-YY	5600	0.02	<b>5,10</b>	100	0.252	0.8	21.0	60
07P/F-682X-YY	6800	0.02	<b>5,10</b>	100	0.252	0.7	29.0	55
07P/F-822X-YY	8200	0.02	<b>5,10</b>	100	0.252	0.65	33.0	50

Core Material : Ferrite

Revision date : 31 Jul 2014

SPQ :

Packing Form	Loose / Box	Taped / Reel
Radial	500 [-50]	700 [-51]

Remarks: Also available with shorter leads.