
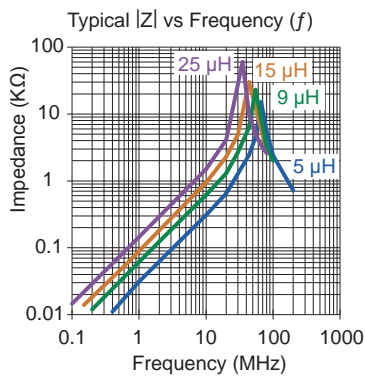


LSSC 

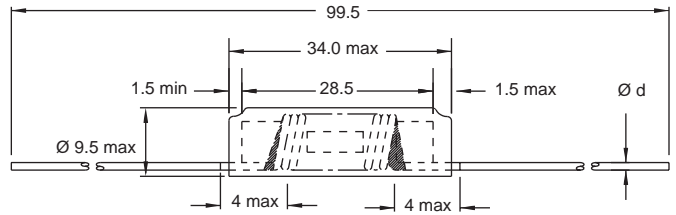

Single layer

Part No	Inductance	$f_L$	Tol	DCR	Rated DC	$\varnothing d$
	L ( $\mu\text{H}$ )	(MHz)	$\pm$ (%)	max (m $\Omega$ )	Current (A)	(mm)
LSSC-5R0M-00	5	1	20	5	10	1.30
LSSC-9R0M-00	9	1	20	12	6	0.95
LSSC-150M-00	15	0.1	20	24	4	0.75
LSSC-250M-00	25	0.1	20	46	3	0.63

Core Material : Ferrite

Revision date : 11 Aug 2014

SPQ :

Packing Form	Loose / Box
Axial	200 [-00]

**Remarks** : - Available also without insulating material (LSSC/B).  
- Single layer - Model with Insulation Foil are suitable for application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).