
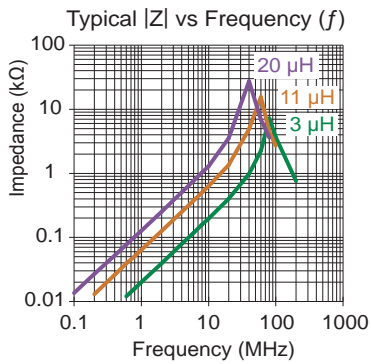
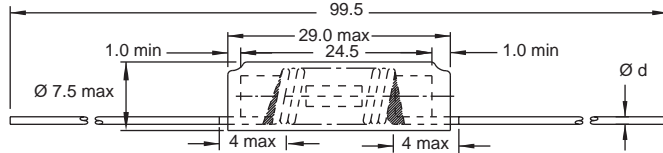


MSSC



Part No	Inductance	$f_L$	Tol	DCR	Rated DC	$\varnothing d$
	L ( $\mu H$ )	(MHz)	$\pm$ (%)	max (m $\Omega$ )	Current (A)	(mm)
MSSC-3R0M-00	3	1	20	6	9	1.18
MSSC-6R0M-00	6	1	20	10	6	0.95
MSSC-110M-00	11	0.1	20	20	4	0.70
MSSC-130M-00	13	0.1	20	24	3	0.70
MSSC-200M-00	20	0.1	20	54	3	0.50

Single layer

Core Material : Ferrite

Revision date : 11 Aug 2014

SPQ :

Packing Form	Loose / Box
Axial	350 [-00]

**Remarks :** - Available also without insulating material (MSSC/B)  
- Single layer - Model with Insulation Foil are suitable for application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).