

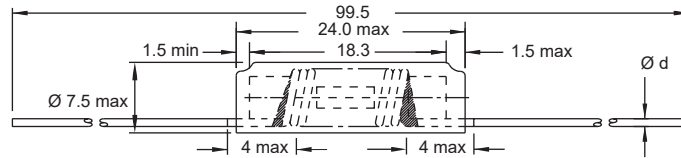


**SSSC**



Single layer

Part No	Inductance L ( $\mu$ H)	$f_L$ (MHz)	Tol $\pm$ (%)	DCR max (m $\Omega$ )	Rated DC Current (A)	$\varnothing$ d (mm)
SSSC-4R0M-00	4	1	20	14	6	0.8
SSSC-6R0M-00	6	1	20	17	4	0.75
SSSC-8R0M-00	8	1	20	25	3	0.63, 0.65
SSSC-170M-00	17	0.1	20	63	2	0.45

**Core Material:** Ferrite

Revision date: 02 Sept 2016

**SPQ:**

Packaging Form	Loose / Box
Axial	500 [-00]

**Remarks:** - Available also without insulating material (SSSC/B)  
- Single layer - Model with Insulation Foil are suitable for application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).