




12 CCM

Non-magnetic

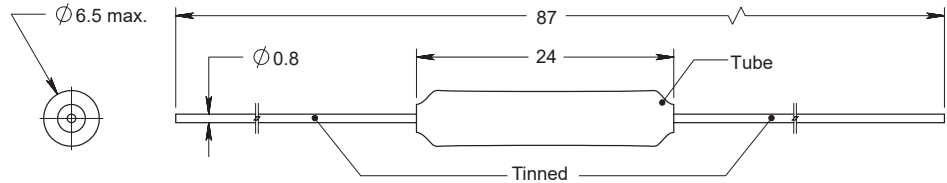

Leaded Inductors / Medical Applications

Fixed Choke Coils

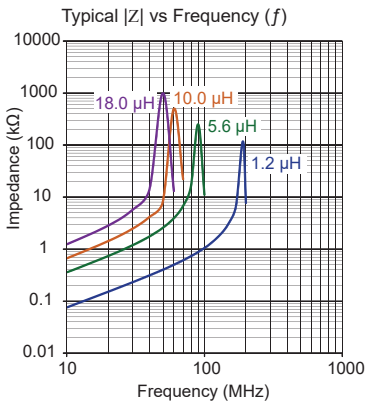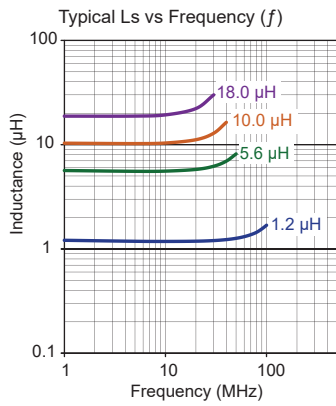

Part No	Inductance	f_L	Tol	Q	f_Q	SRF	DCR	Rated DC
	L (μ H)	(MHz)	\pm (%)	min	(MHz)	typ (MHz)	max (Ω)	Current max (mA)
12CCM-1R2X-01	1.20	1	10,20	55	7.9	240	0.100	2250
12CCM-1R5X-01	1.50	1	10,20	55	7.9	230	0.130	1750
12CCM-1R8X-01	1.80	1	10,20	55	7.9	200	0.180	1580
12CCM-2R2X-01	2.20	1	10,20	55	7.9	180	0.225	1365
12CCM-2R7X-01	2.70	1	10,20	55	7.9	165	0.280	1215
12CCM-3R3X-01	3.30	1	10,20	55	7.9	150	0.350	1010
12CCM-3R9X-01	3.90	1	10,20	55	7.9	140	0.480	860
12CCM-4R7X-01	4.70	1	10,20	55	7.9	130	0.650	750
12CCM-5R6X-01	5.60	1	10,20	55	7.9	120	0.850	620
12CCM-6R8X-01	6.80	1	10,20	55	7.9	110	1.180	520
12CCM-8R2X-01	8.20	1	10,20	55	7.9	95	1.350	520
12CCM-100X-01	10	1	10,20	55	7.9	90	2.090	400
12CCM-120X-01	12	1	10,20	35	2.5	80	2.500	370
12CCM-150X-01	15	1	10,20	35	2.5	70	3.800	300
12CCM-180X-01	18	1	10,20	35	2.5	65	5.100	270

Core Material: Phenolic

Revision date: 25 Aug 2020

SPQ:

Packaging Form	Taped / Reel
Axial	1000 [-01]